



PCT

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

Holstlaan 6, NL-5656 AA Eindhoven (NL). HERWIG, Peter, T.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). GEUNS, Thomas, C., T.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: RAAP, Adriaan, Y.; Internationaal Octrooibureau B.V., Prof Holstlaan 6, NL-5656 Aa Eindhoven (NL).

(81) Designated States (national): CN, JP, KR.


English

English

(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published:
— *With international search report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

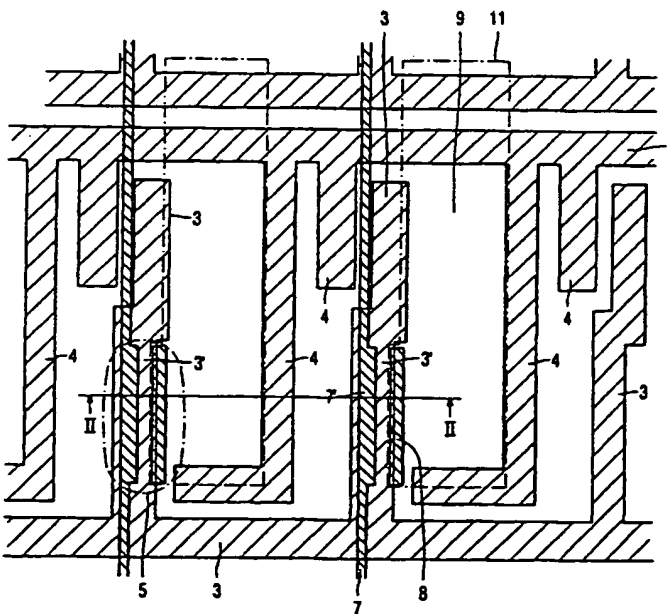

(57) Abstract: Display device in which switching elements (5) are realized in an organic semiconductor layer. Mutual insulation of the elements and pixels is obtained either electrically by applying depletion via voltages to a guard line (4) or physically by making parts of the organic semiconductor layer insulating.

BN/SDOCID: <WO__0115233A1_I_>

BEST AVAILABLE COPY

WO 01/15233 A1

least at the area of the switching elements and the picture electrodes, and the display device comprises means for supplying at least one electrode, which, viewed perpendicularly to the substrate, substantially completely surrounds a picture electrode, with such a voltage that layers of organic semiconductor material at the area of switching elements and associated picture electrodes are substantially completely insulated from each other. The electrodes (guard lines) for a plurality of pixels are connected, for example, in an electrically conducting manner to an electrode which surrounds the complete picture surface and which is supplied with such a voltage during use that the semiconductor areas below (or above) the electrodes are insulating. The electrode may also be connected to a gate electrode of a TFT transistor in a matrix display. Since in a matrix of pixels only one row is selected at a time, the semiconductor areas below the gate electrodes are non-conducting during non-selection of the relevant row and constitute the desired insulator. By connecting the electrode to a gate electrode of a field effect transistor for a pixel in an adjacent row, a greater effective pixel surface is obtained.

If desired, said electrode may be provided as a pattern of guard lines underneath the semiconductor layer, with the pattern coinciding, for example, partly with that of the gate electrodes. In that case, the leakage currents are substantially completely eliminated. If necessary, said pattern may function as a black mask. The leakage currents may also be reduced by giving the gate electrode and said electrode meshing comb structures. Also the reverse structure (guard lines above and gate electrodes below the semiconductor layer) is possible.

Another embodiment of a display device according to the invention is characterized in that the layer of organic material comprises organic semiconductor material surrounded by insulating organic material at least at the area of the switching elements. In this case, the insulating organic material is obtained by selectively illuminating a polymer semiconductor material (for example, polythienylene vinylene (PTV)) locally with UV radiation by means of a mask so that it changes into insulating organic material. In this respect, it is to be noted that insulating the channel part for single TFT transistors is described in example 11 of USP 5,854,139.

Since depolarization may occur when using plastic substrates, polarizers are preferably used as substrates. It is alternatively possible to choose electro-optical effects at which no external polarizers are used such as, for example, PDLC.

These and other aspects of the invention are apparent from and will be elucidated with reference to the embodiments described hereinafter.

tin oxide and metal and patterning this layer so that the double layer is maintained at the area of these contacts and electrodes 7, 8, 9. Subsequently, the metal is etched selectively, so that the picture electrodes 9 are free.

5 In the TFT transistors, the voltage at the gate electrodes determines whether there is conduction or no conduction between source and drain. In this example, with the p-conductivity type of the semiconductor material, the gate area is depleted with a positive voltage at the gate electrodes relative to the source or drain electrodes.

10 According to the invention, each pixel is substantially completely surrounded by an electrode 4 which, at a sufficiently positive voltage of the gate relative to the source/drain, causes depletion in the superjacent part of the semiconductor material. To this end, the ultimate device of Fig. 2 may be provided with a special voltage source. In this way, the different pixels can be mutually insulated without having to etch the semiconductor structure.

15 In this example, a black mask 13 which counteracts the influence of incident light on the transistor action is present on the insulating layer 12. Furthermore, the liquid crystal display device comprises a second substrate 16 provided with a counter electrode 17, while in this example the display device is provided in generally known manner with orientation layers 14 and a liquid crystalline material 15 which, if necessary, may be polymerized.

20 In this example, the picture electrode overlaps the (previous) address line (gate line) with which and with the intermediate insulating material it forms a storage capacitance C_{st} in generally known manner, which may even be increased by providing this above the mask 4.

25 Although the device may be provided, as usual, with one or more polarizers, a polarizer is preferably used as a substrate so as to prevent depolarizing effects, or an LC effect (or another electro-optical effect) at which no external polarizers are used.

30 Fig. 3 shows how the metallization pattern (guard line) 4 substantially completely surrounds a picture electrode 9, which is shown diagrammatically, but also reduces the effective pixel surface. Fig. 4 shows an alternative in which the two masks 3, 4 are integrated, as it were. Each guard line is then connected to the previous gate line. In this case, the first row of pixels must be connected to an extra (dummy) line. When a row is being written, a small leakage current may flow for some time to picture electrodes of the subsequent row to be selected. Since this row is written immediately thereafter, at which the voltage on the previous row has a sufficient blocking voltage, this effect, averaged through a

electrodes 3' are formed at the area of juxtaposed source and drain contacts 7, 8. The layer of organic semiconductor material 10 is subsequently converted locally into organic insulating material 21. To this end, the layer 10 is illuminated with UV radiation 22 via a mask 20 (Fig. 10), with the organic semiconducting material 10 becoming insulating at the illuminated areas. The contours of the mask 20 used are denoted by dot-and-dash lines 20 in Fig. 9. In this case, only the area near the TFT transistors is still semiconducting but this is not strictly necessary as long as different TFT transistors are mutually insulated by the insulating parts 21. Other reference numerals in Fig. 11 have the same significance as in Fig. 2.

The invention is of course not limited to the examples shown. For example, reflective display devices may also be realized by starting from non-transparent substrates and by forming the picture electrodes as reflecting electrodes. For example, aluminum is then chosen as a material for the picture electrodes. A double layer is then not necessary for providing the column electrodes 7 (and the source and drain electrodes 7', 8) and the picture electrodes 9.

In summary, the invention relates to a display device based on an active matrix, in which switching elements are formed in a layer of organic semiconductor material, which switching elements are mutually insulated via depletion areas or insulating areas in the same layer of organic semiconductor material.

1/5

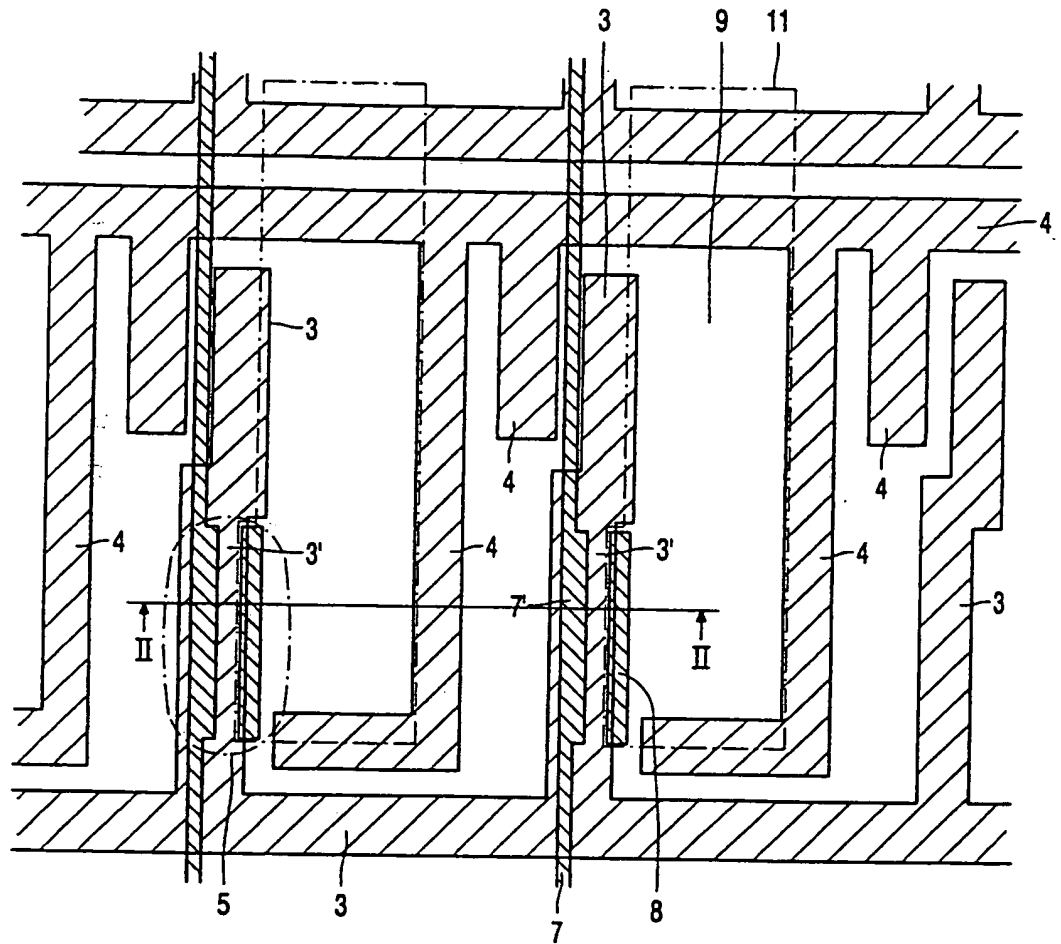


FIG. 1

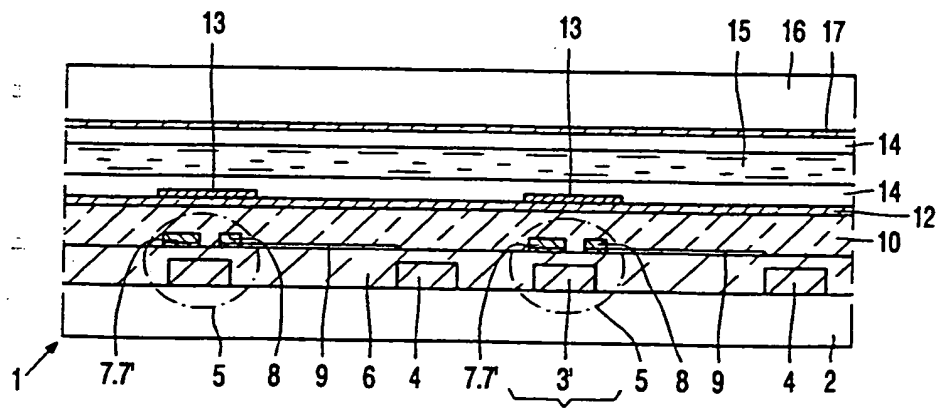


FIG. 2

3/5

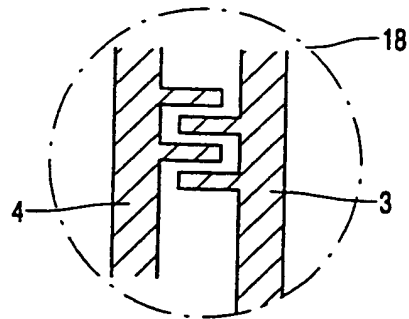


FIG. 5

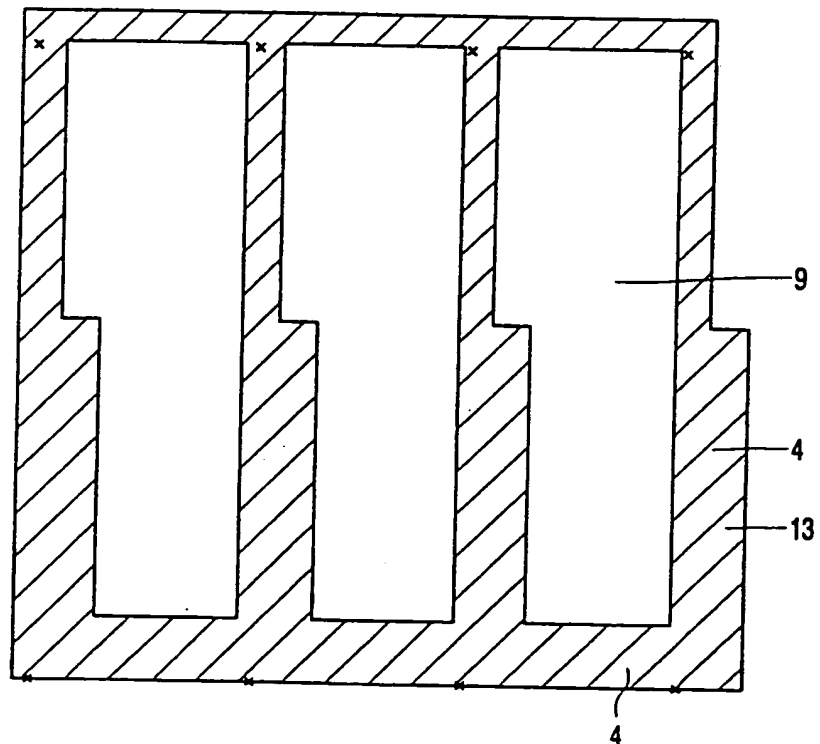


FIG. 6

5/5

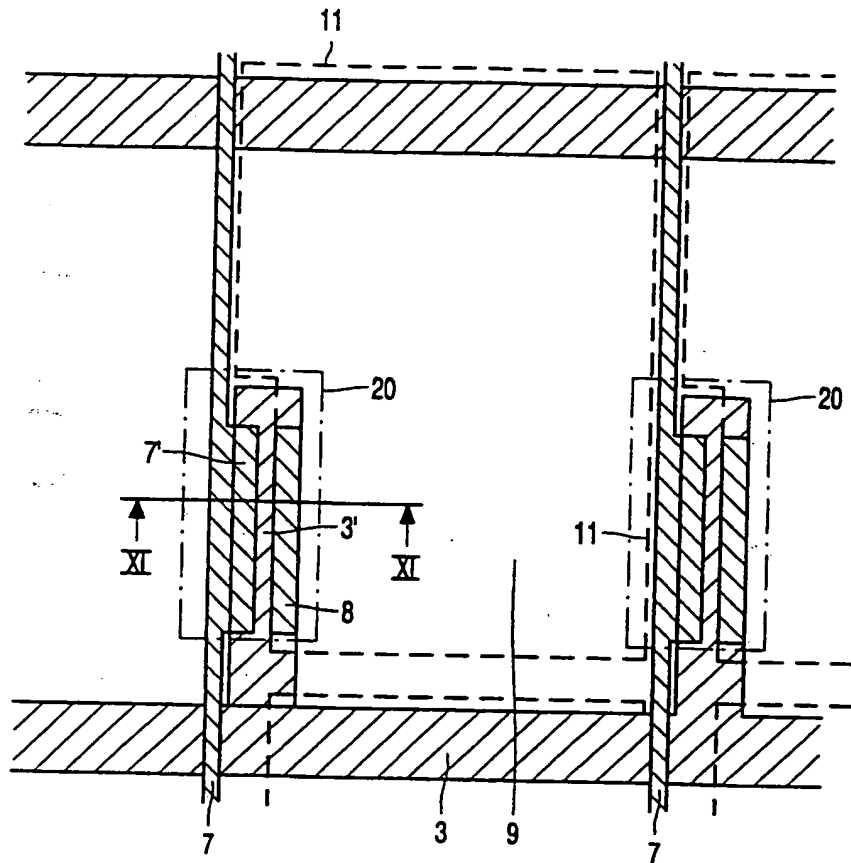


FIG. 9

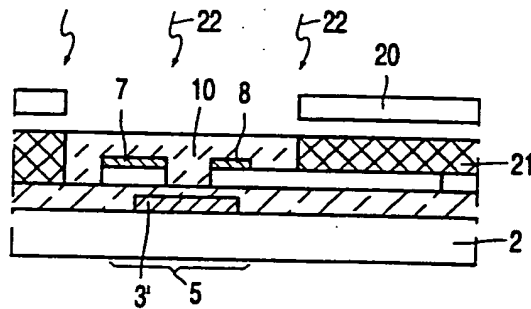


FIG. 10

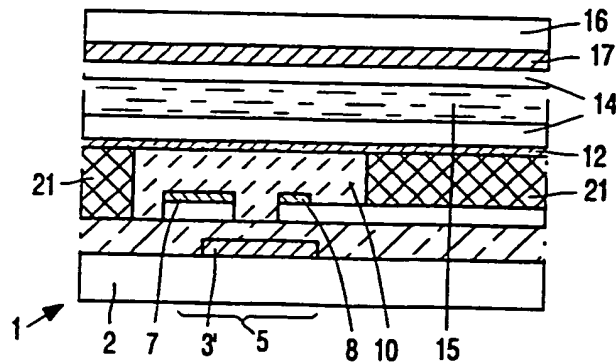


FIG. 11

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 00/07877

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 90 08402 A (MITSUBISHI ELECTRIC CORP ;SUMITOMO CHEMICAL CO (JP)) 26 July 1990 (1990-07-26) abstract ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 530 (E-1287), 30 October 1992 (1992-10-30) & JP 04 199638 A (RICOH CO LTD), 20 July 1992 (1992-07-20) abstract ---	1
A	SIRRINGHAUS H ET AL: "INTEGRATED OPTOELECTRONIC DEVICES BASED ON CONJUGATED POLYMERS" SCIENCE, AMERICAN ASSOCIATION FOR THE ADVANCEMENT OF SCIENCE, ,US, vol. 280, 12 June 1998 (1998-06-12), pages 1741-1744, XP000876551 ISSN: 0036-8075 the whole document -----	